


Electrical pressure sender specs

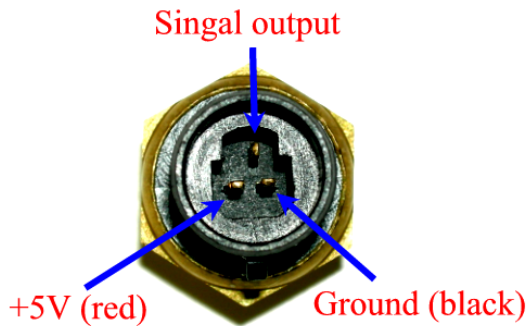

Case:	Brass
Connector:	water sealed Packard compatible connector
Port thread:	1/8" or any customer specified
Output:	0.5 - 4.5VDC, or customized
Input pressure:	0-15psi, 0-30psi, 0-80psi, 0-100psi, 0-150psi, 0-200psi, 0-500psi, 0-1000psi, 0-1600psi
Working temp:	-4F (-20C) to +260F (125C)
Accuracy:	±1% FS, ±2% FS
Over pressure:	200% FS

FS – full scale

Output table:

Input Pressure (FS)	0%	20%	40%	60%	80%	100%
Output voltage (V)	0.5	1.3	2.1	2.9	3.7	4.5

For example, 100 psi will be:

Input Pressure (PSI)	0	20	40	60	80	100
Output voltage (V)	0.5	1.3	2.1	2.9	3.7	4.5