


$14 \frac{3}{4} - 9 \frac{1}{2} = 5 \frac{1}{4}$ COMP TRAVEL

$2 \frac{3}{16} - \frac{10}{16} = 1 \frac{9}{16}$ GAP FOR BUMPSTOP @ ZERO COMPRESSION

RIDE HEIGHT 12 $\frac{1}{2}$

$\sim 40\text{mm}$

$14 \frac{3}{4} - 12 \frac{1}{2} = 2 \frac{1}{4}$ DROOP TRAVEL

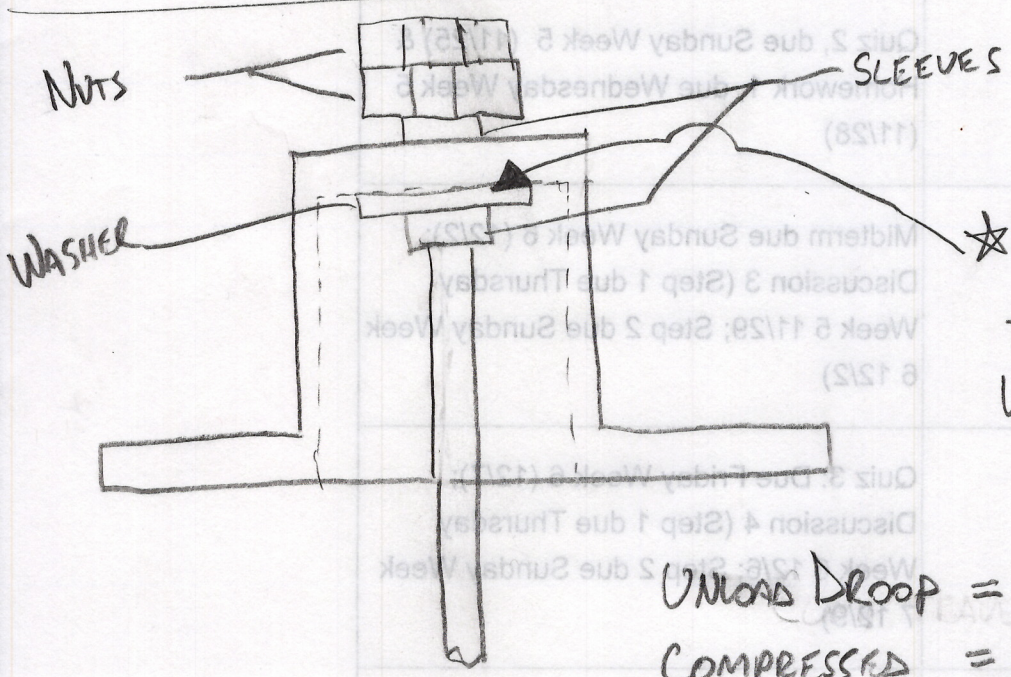

* NEED TO ADD RUBBER ISOLATOR HERE ABOVE WASHER. THICKNESS EQUALS "X"

UNLOAD DROOP = $14 \frac{3}{4} + X$

COMPRESSED = $9 \frac{1}{2}$

COMP TRAVEL = $5 \frac{1}{4} + X$

GAP FOR BUMPSTOP = $1 \frac{9}{16} - X$

DROOP TRAVEL = $2 \frac{1}{4} + X$